


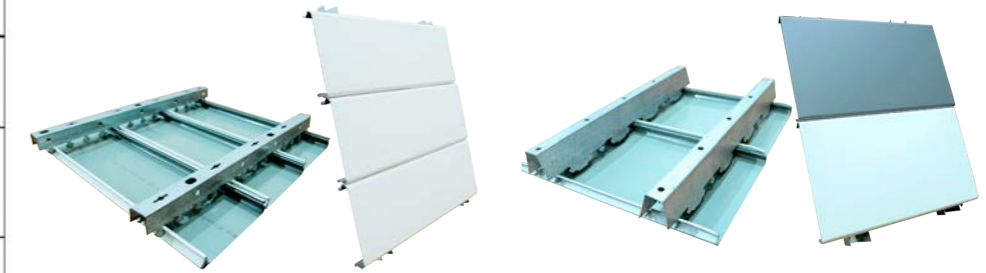


PANELLUX® LINEAR CEILING 100R/150R





VELODROME LRT STATION - JAKARTA

PRODUCT	INFORMATION
 ROD M4	ROD DRAT M4 Material : Wire Rod Galvanized 3,5mm
 Width : 30 mm Height : 45 mm STR-150R	STRINGER 150R Material : Zinalume® Steel Length : 4 m
 Width : 150 mm Height : 16,5 mm 150R	PANELLUX 150R Material : Aluminium Standard Color : White, Silver, Cisadane Brown (Light Brown), Anti Cooper (Dark Brown).
 Width : 30 mm Height : 45 mm STR-100R	STRINGER 100R Material : Zinalume® Steel Length : 4 m
 Width : 100 mm Height : 16,5 mm 100R	PANELLUX 100R Material : Aluminium Standard Color : White, Silver, Cisadane Brown (Light Brown), Anti Cooper (Dark Brown).
 19 19 WA-1919	WALL ANGLE 1919 Material : Aluminium Length : 3 m
 10 14 19 SM-1914	SHADOW MOULDING 1914 Material : Aluminium Length : 3 m









LINEAR CEILING 100R

LINEAR CEILING 150R

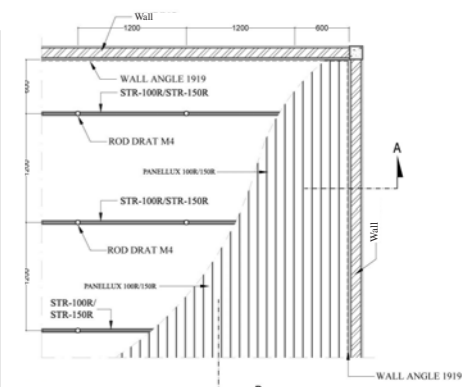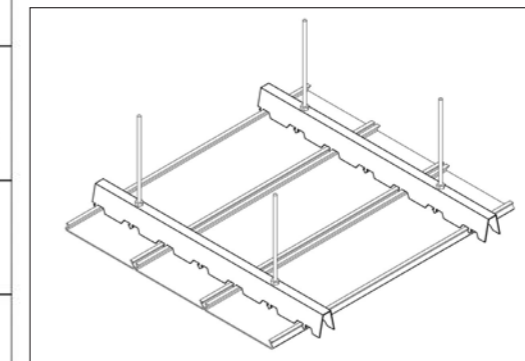

LINEAR CEILING 100R/150R INSTALLATION

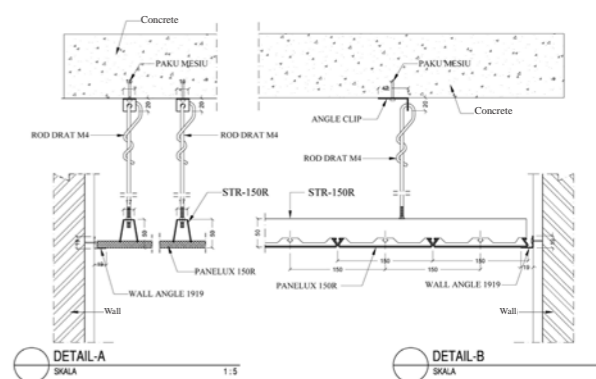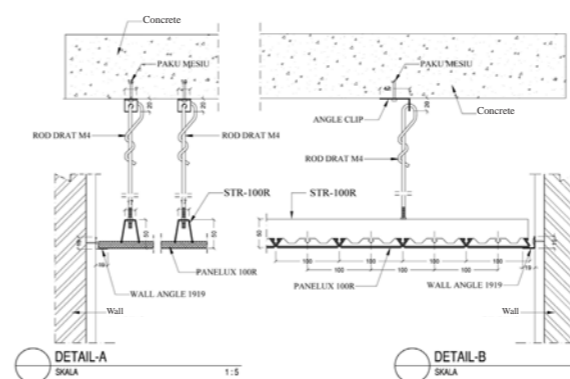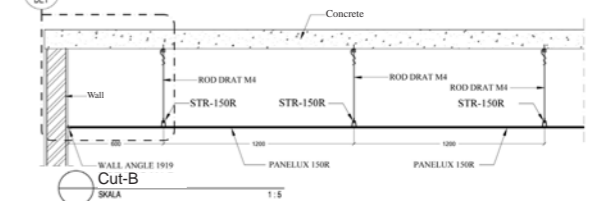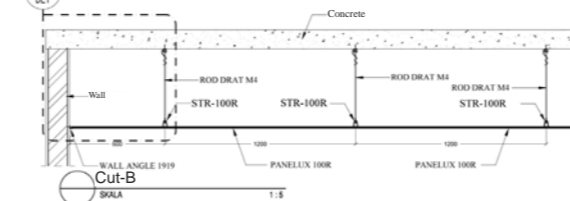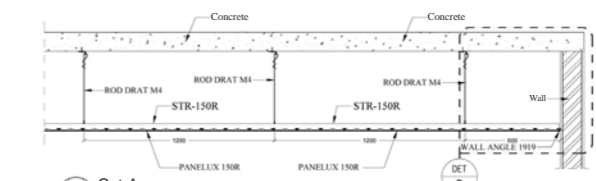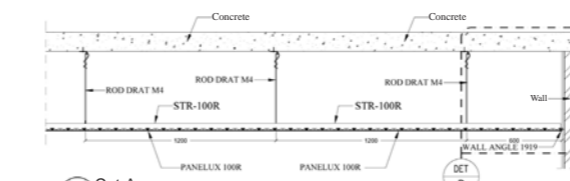

PANELLUX® LINEAR CEILING 100R/150R

PANELLUX® Linear Ceiling 100R/150R is easy to install and provides a functional look towards your ceiling profile. With profile width of either 100mm (100R) or 150mm (150R), it will give an elegant minimalistic look. It is ideally applied in both interior and exterior ceiling projects, including terraces, corridors, canopies and lobbies in airport terminals, shopping malls, showrooms, apartments, offices, factories and other types of projects.

PANELLUX® Linear Ceiling 100R/150R is made of Pre-painted Aluminium Alloy 100. Installation is easy with stringer suspension with Clip-Lock system without the need of bolts nor fasteners.