








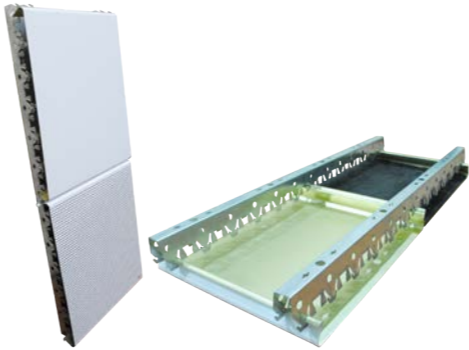
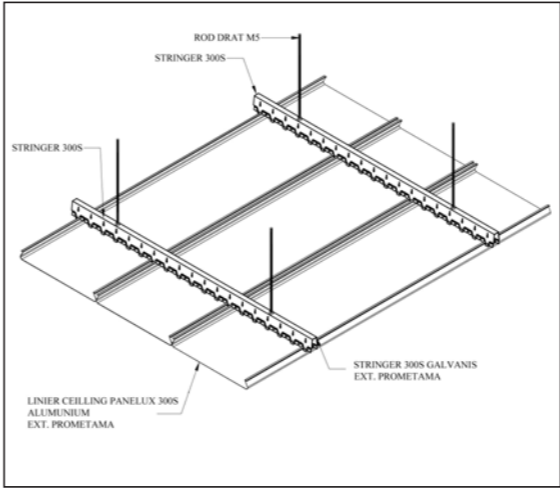
THE ASEAN SECRETARIAT - JAKARTA

# PANELLUX® LINEAR CEILING 300S

**PANELLUX® Linear Ceiling 300S** is easy to install and provides a functional look towards your ceiling profile. With profile width of either 300mm, it will give an elegant minimalistic look. It is ideally applied in both interior and exterior ceiling projects, including terraces, corridors, canopies and lobbies in airport terminals, shopping malls, showrooms, apartments, offices, factories and other types of projects.




**PANELLUX® Linear Ceiling 300S** is made of Pre-painted Aluminium Alloy 100. Installation is easy with stringer suspension with Clip-Lock system without the need of bolts nor fasteners.

PRODUCT	INFORMATION
 ROD M6	ROD DRAT M6 Material : Wire Rod Galvanized 6mm
 STG-R	STRINGER 300S Material : Galvanized Length : 3 m
 Width : 300 mm 300S	PANELLUX 300S Material : <b>Aluminium</b> Standard Color : White Length : Custom
 19 19 WA-1919	WALL ANGLE 1919 Material : <b>Aluminium</b> Length : 3 m
 10 14 19 SM-1914	SHADOW MOULDING 1914 Material : <b>Aluminium</b> Length : 3 m



LINEAR CEILING 300S

# PANELLUX® LINEAR CEILING 300S

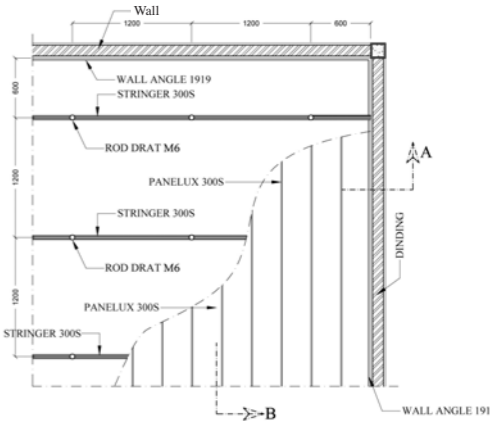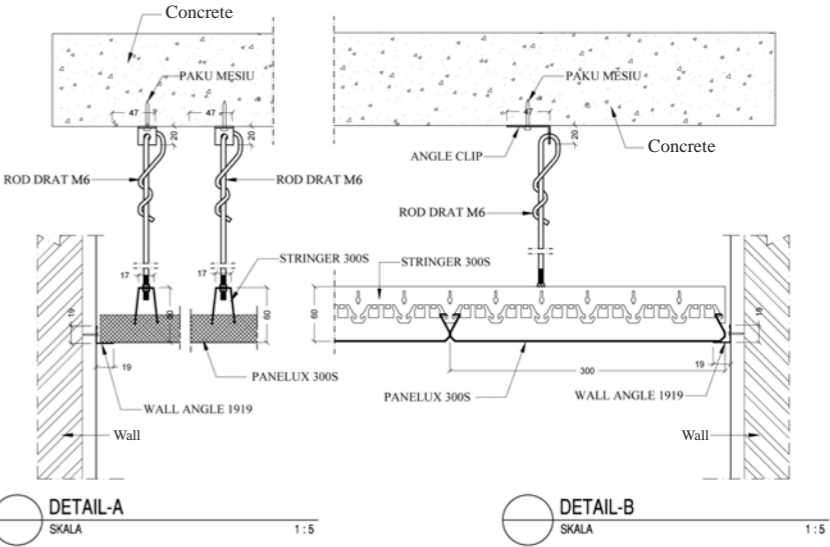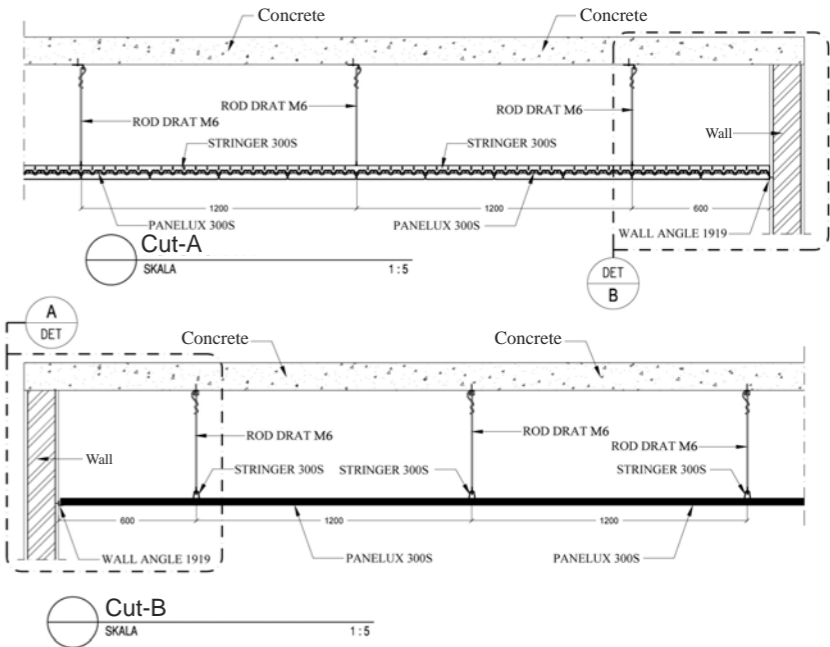

LINEAR CEILING 300S INSTALLATION